

Noritake
CANADA LIMITED

90 NUGGET AVENUE, AGINCOURT, ONTARIO, CANADA M1S 3A7
TEL: (416) 291-2946 FAX: (416) 292-0239

Electronics Division

Fax To: Weidmueller ⁴¹⁵⁻⁵⁸⁵⁵ (905) ~~418-5796~~
Att: Mr. Aubhey Kagan

Fax No.

Date: May, 01, 1995

Total Page: 17

From: Tad Oniya

Enclosed is the specifications for
CU40026SCPB-T20A.

Regards.

VACUUM FLUORESCENT DISPLAY MODULE
SPECIFICATION

Model: CU40026SCP B-T20A

SPECIFICATION NO. : DS-157-0000-03

DATE OF ISSUE : May., 18, 1990

REVISION : May., 31, 1990

: Jan., 5, 1991

: Apr., 22, 1992

PUBLISHED BY : ISE ELECTRONICS CORP./JAPAN

CU40026SCPB-T20A

1. General Description

1.1 Application : Readout of computer, micro-computer, communication terminal and automatic instruments.

1.2 Construction : Single board display module consists of 80 character (2 x 40) VFD, refresh memory, character generator, control circuit, DC / DC converter and all necessary control logics. Interface level is TTL compatible and the module can be connected to the CPU bus of host directly.

1.3 Drawing : See attached drawings.

2. Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Condition |
|----------------------|--------|------|------|------|------|-----------|
| Logic Input Voltage | VI | 0 | — | 5.5 | VDC | — |
| Power Supply Voltage | VCC | 0 | — | 7.0 | VDC | — |

3. Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Condition |
|----------------------|--------|------|------|------|------|------------|
| Logic Input Voltage | "H" | VIH | 2.0 | — | VDC | — |
| | "L" | VIL | — | 0.8 | | |
| Logic Output Voltage | "H" | VOH | 2.4 | — | VDC | IOH=—2.0mA |
| | "L" | VOL | — | 0.5 | | IOL=2.0mA |
| Power Supply Voltage | VCC | 4.75 | 5.0 | 5.25 | VDC | — |
| Power Supply Current | ICC | — | 0.7 | 0.8 | mADC | VCC=5.0V |

Slow start power supply may cause erroneous operation.

ICC might be anticipated twice as usual at power on rush.

CU40023SCPB-T20A

4 . Optical Specifications

| | |
|-----------------------|--|
| Number of characters | : 80(2 lines x 40 chrs) |
| Matrix format | : 5 x 7 dot + Underline |
| Display area | : 188.55 x 16.0 mm (X x Y) |
| Character size | : 3.3 x 5.05 mm (X x Y) |
| Character pitch | : 4.75 x 9.95 mm (X x Y) |
| Dot size | : 0.5 x 0.55 mm (X x Y) |
| Dot pitch | : 0.7 x 0.75 mm (X x Y) |
| Luminance | : 350 cd/m ² (100 fL) Min. |
| Color of illumination | : Blue-green |

5 . Environmental Specifications

| | |
|-----------------------|---|
| Operating temperature | : -10 to +65 °C |
| Storage temperature | : -40 to +85 °C |
| Operating humidity | : 20 to 80 % RH |
| Vibration | : 10 to 55 Hz, 10 Gmax., 3 directions, 30 min. each |
| Shock | : 100 G, 9 mS. |

6 . Functional Descriptions

This module provides the functions of 8 bit parallel and serial data write.
Each control data and character fonts are shown in Character Table0 and 1.
All data write should be done during BUSY line is low.

| $\overline{\text{CS}}$ | $\overline{\text{WR}}$ | Function | Bus direction |
|------------------------|------------------------|--------------|---------------|
| 0 | ↑ | Data write | Module ← Host |
| 1 | × | No operation | Module × Host |

↑ : Rising edge of pulse × : Don't care

6 . 1 Character data write

Character font is displayed on the screen, and HT is executed.

(see para . 8 . 2 . 2 HT)

CU40026SCPB-T20A

6.2 Control data write

Detail of control data are shown in this clause. The term "Cursor" is the same meaning of "Writing Position".

6.2.1 BS : Back Space (08 Hex)

The cursor moves one character to the left.

At the left end, it moves to the upper right end.

At the top left end, the cursor doesn't move.

6.2.2 HT : Horizontal Tab (09 Hex)

The cursor moves one character to the right.

At the right end, the cursor moves to the lower left end.

At the bottom right end, the cursor motion is depended upon DC1 and DC2 mode.

DC1 : The cursor moves to the top left end.

DC2 : All displayed characters are scrolled up one line.

The cursor moves to the bottom left end and all written characters in the top line is disappeared. The bottom line is cleared.

6.2.3 LF : Line Feed (0A Hex)

The cursor moves to the same column on the lower line.

At the bottom line, it is depended upon DC1 and DC2 mode.

DC1 : The cursor moves to the same column on the top line.

DC2 : All displayed characters are scrolled up one line.

The cursor keeps the same column on the bottom line, and the bottom line is cleared.

6.2.4 FF : Form Feed (0C Hex)

The cursor moves to the top left end.

6.2.5 CR : Carriage Return (0D Hex)

The cursor moves to the left end on the same line.

6.2.6 CLR : Clear (0E Hex)

All displayed characters are cleared. The cursor doesn't move.

6.2.7 DC1 : Device Control 1 (11 Hex) ... Character over write mode

DC2 : Device Control 2 (12 Hex) ... Scroll up mode

Alternative LINE ENDING MODE is specified by DC1 and DC2 when character data or HT or LF is written. Just after power on or initialize, DC1 is selected (Default Mode).

6.2.8 DC4 : Device Control 4 (14 Hex) ... Cursor is displayed on Underline.

DC5 : Device Control 5 (15 Hex) ... Cursor is displayed as a blinking all dot character.

DC6 : Device Control 6 (16 Hex) ... Cursor is turned to invisible.

DC7 : Device Control 7 (17 Hex) ... Cursor is displayed as a blinking Underline.

Above four codes control the cursor rendition. DC4 is default mode. The mode is maintained until other mode is selected. The blinking speed can be varied by ESC sequence. (see para. 6.2.10 ESC)

CU10026SCPB-T20A

- 6.2.9 CTO : Character Table 0 (18 Hex) ... International character font
 CT1 : Character Table 1 (19 Hex) ... KATAKANA character font

Above two codes select Character Table. Just after power on, CTO is selected (Default Mode). Any characters from those 2 tables can be displayed on the screen by the bank selection.

6.2.10 ESC : Escape (1B Hex)

The character or data strings succeeding of ESC code control the various functions such as user definable font, cursor addressing, screen luminance control, selection of data writing mode, blink speed control and initialize.

(1) User Definable Font (UDF)

User's desired fonts can be defined by software. The fonts will be memorized in RAM of the CPU.

Syntax : ESC (1B Hex) + "C" (43 Hex) + CHR + PT1 + PT2 + PT3 + PT4 + PT5

Any 5 x 7 dot patterns consisted of data from PT1 thru PT5 can be stored in character code location specified by CHR.

Maximum number of UDF are 2 characters at once. Storing more than 2 will kill the oldest font. However, within the 2 character codes where already defined by UDF, the over-write-latest font replaces the former font.

1st byte : ESC (1B Hex)

2nd byte : "C" (43 Hex)

3rd byte : CHR (00 Hex to FF Hex)

Specify the character code location from 00 Hex to FF Hex by CHR.

If CHR overlaps the control codes such as BS, HT, etc., the control function will be lost. And therefore, overlap to the ESC code may not avail further UDF.

4th to 8th byte : PT1 thru PT5

Specify ON or OFF of 36 dot position (5 x 7 dot + Underline).

Following table shows the relation of dot position and the data formation.
 ("1" = dot turn on, "0" = dot turn off)

| | 7(MSB) | 6 | 5 | 4 | 3 | 2 | 1 | 0(LSB) |
|----------|--------|-----|-----|-----|-----|-----|-----|--------|
| 4th byte | P8 | P7 | P6 | P5 | P4 | P3 | P2 | P1 |
| 5th byte | P16 | P15 | P14 | P13 | P12 | P11 | P10 | P9 |
| 6th byte | P24 | P23 | P22 | P21 | P20 | P19 | P18 | P17 |
| 7th byte | P32 | P31 | P30 | P29 | P28 | P27 | P26 | P25 |
| 8th byte | * | * | * | * | UL | P35 | P34 | P33 |

* : don't care UL : Underline

CU40026SCP8-T20A

Following is the dot assignment.

| | | | | |
|-----|-----|-----|-----|-----|
| P1 | P2 | P3 | P4 | P5 |
| P6 | P7 | P8 | P9 | P10 |
| P11 | P12 | P13 | P14 | P15 |
| P16 | P17 | P18 | P19 | P20 |
| P21 | P22 | P23 | P24 | P25 |
| P26 | P27 | P28 | P29 | P30 |
| P31 | P32 | P33 | P34 | P35 |
| U L | | | | |

After execution of above sequence, a defined font will be stored in the character code location "CHR" (Hex)

Following is an example of UDF sequence.

Example : "!" dot pattern should be stored in character code location A0 Hex.

Desired Dot Pattern

| | | | | |
|--|--|---|--|--|
| | | ● | | |
| | | ● | | |
| | | ● | | |
| | | ● | | |
| | | | | |
| | | | | |
| | | | | |
| | | ● | | |
| | | | | |

Turn on dot number

P3

P8

P13

P18

P33

CU40026SCPB-T20A

Assign turn on dot number to the bit table as follows.

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Data (Hex) |
|----------|---|---|---|---|---|---|---|---|------------|
| 4th Byte | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 84 |
| 5th Byte | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 10 |
| 6th Byte | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 02 |
| 7th Byte | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 00 |
| 8th Byte | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 01 |

Then Syntax should be written : 1B + 43 + A0 + 84 + 10 + 02 + 00 + 01 (Hex)

(2) Cursor Moving

The cursor can be moved any position of the screen by following ESC sequence.

Syntax : ESC (1B Hex) + "H" (48 Hex) + 1 Byte data

| Column Line | Left end | 2nd | 3rd | - - - - - ÷ - | Right end |
|----------------|----------|-----|-----|---------------|-----------|
| Top | 00 | 01 | 02 | - - - - - - - | 27 |
| Bottom | 28 | 29 | 2A | - - - - - - - | 4F |

Data = 50 Hex to FF hex : The cursor doesn't move.

(3) Luminance Control

The screen luminance can be varied by following ESC sequence.

Just after power on, the screen luminance is set to 100%.

Syntax : ESC (1B Hex) + "L" (4C Hex) + 1 Byte data

Data = 00 Hex to 3F Hex : approx. 30%
 40 Hex to 7F Hex : approx. 50%
 80 Hex to BF Hex : approx. 75%
 C0 Hex to FF Hex : 100%

CU40028SCPB-T20A

(4) Selection of Writing Mode

Flickerless Mode can be selected by following ESC sequence.

Syntax : ESC (1B Hex) + " S " (53 Hex) ... Flickerless Mode

Within Flickerless Mode, although BUSY might become longer, flickerless-high speed-continuous-data write can be achieved since refreshing of the screen has priority over the data acceptance.

Quick data write with minimum BUSY time will be given by Quick Write Mode since the data acceptance has the priority over the refreshing of the screen.

Within this mode, continuous high speed data write may cause flicker display.

Note :

When serial data write with high speed baud rate at Flickerless Mode, it may have the read error of the data. Busy check within Flickerless Mode or setting to the Quick Write Mode is recommended for serial data write.

Just after power on or initialize, Quick Write Mode is selected until other mode is set.

After selected Flickerless Mode, Quick write Mode can't be selected unless otherwise Initialize.

(5) Blink Speed Control

Blinking speed of Block cursor can be varied by following ESC sequence.

Syntax : ESC (1B Hex) + " T " (54 Hex) + 1 Byte Data

Data = 00 Hex ... 256

FF Hex ... 255

FE Hex ... 254

:

01 Hex ... 1

Period of Blinking = Data Value x 30 mS

At power on default, 20 (14 Hex) is set to data.

(6) Initialize

All displayed characters and all setting factors are cleared by following ESC sequence.

Syntax : ESC (1B Hex) + " I " (49 Hex)

Execution of above sequence, module is reset as just after power on.

6.3 Test Mode

Test Mode is set by SIN(TO) is low more than 100mS at power on or initialize.

During Test Mode, all character fonts are displayed automatically, and no any data are acceptable.

CU40026SCPB-T20A

6.4 Character and control code table

Following 2 character tables can be selected. (see para. 6.2.9)

6.4.1 International character font

| | | | | | | | | | | | | | | | | | |
|-------------|----------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| | D7 D6 D5 D4 | 0 0 0 0 | 0 0 0 1 | 0 0 1 0 | 0 0 1 1 | 0 1 0 0 | 0 1 0 1 | 0 1 1 0 | 0 1 1 0 | 1 0 0 1 | 1 0 0 1 | 1 0 1 0 | 1 0 1 0 | 1 1 0 1 | 1 1 0 1 | 1 1 1 0 | 1 1 1 0 |
| D3 D2 D1 D0 | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F |
| 0 0 0 0 | 0 | | | SP | 0 | a | P | ` | F | E | Σ | | " | A | D | á | ó |
| 0 0 0 1 | 1 | | DC1 | ! | 1 | A | Q | a | q | ° | Q | i | ± | A | R | á | n |
| 0 0 1 0 | 2 | | DC2 | " | 2 | B | R | b | r | í | ≡ | q | 2 | A | ó | á | ó |
| 0 0 1 1 | 3 | | | # | 3 | C | S | c | s | !× | E | " | A | ó | á | ó | ó |
| 0 1 0 0 | 4 | | DC4 | \$ | 4 | D | T | d | t | L | ÷ | D | " | A | ó | á | ó |
| 0 1 0 1 | 5 | | DC5 | % | 5 | E | U | e | u | W | ° | ° | ° | A | ó | á | ó |
| 0 1 1 0 | 6 | | DC6 | & | 6 | F | U | f | v | r | ° | ° | ° | E | ó | á | ó |
| 0 1 1 1 | 7 | | DC7 | ' | 7 | G | U | g | u | ó | E | S | - | ° | ° | ° | ° |
| 1 0 0 0 | 8 | BS | CT0 | (| 8 | H | X | h | x | € | € | " | " | E | ó | á | ó |
| 1 0 0 1 | 9 | HT | CT1 |) | 9 | I | Y | i | y | h | Δ | θ | 1 | E | ó | á | ó |
| 1 0 1 0 | A | LF | | * | : | J | Z | j | z | θ | * | Δ | " | E | ó | á | ó |
| 1 0 1 1 | B | | ESC | + | : | K | I | k | i | Γ | ° | ° | ° | E | ó | á | ó |
| 1 1 0 0 | C | FF | | , | < | L | \ | l | / | π | θ | " | ° | E | ó | á | ó |
| 1 1 0 1 | D | CR | | - | = | M | I | m | > | τ | J | " | ° | E | ó | á | ó |
| 1 1 1 0 | E | CLR | | . | > | N | ^ | n | " | ° | ° | ° | ° | E | ó | á | ó |
| 1 1 1 1 | F | | | / | ? | O | _ | o | ° | ° | ° | ° | ° | E | ó | á | ó |

CFX101

Character Table 0

CU40026SCPБ-T20A

6.4.2 KATAKANA character font

| | | | | | | | | | | | | | | | | | |
|-------------|----|-----|-----|----|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | D7 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | D6 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| | D5 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 1 |
| | D4 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| D3 D2 D1 D0 | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F |
| 0 0 0 0 | 0 | | | SP | 0 | 0 | P | ~ | P | E | U | | | 一 | ヲ | ニ | 目 |
| 0 0 0 1 | 1 | | DC1 | ! | 1 | Q | a | q | r | 3 | . | . | . | フ | チ | 4 | 月 |
| 0 0 1 0 | 2 | | DC2 | " | 2 | B | R | b | r | 0 | M | 7 | . | イ | ツ | ノ | 火 |
| 0 0 1 1 | 3 | | | # | 3 | C | S | c | s | * | 9 |] | . | ウ | テ | モ | 本 |
| 0 1 0 0 | 4 | | DC4 | \$ | 4 | D | T | d | t | 3 | Q | . | . | エ | ト | ホ | ト |
| 0 1 0 1 | 5 | | DC5 | % | 5 | E | U | e | u | N | 0 | . | . | オ | ナ | 工 | 金 |
| 0 1 1 0 | 6 | | DC6 | & | 6 | F | U | f | u | 0 | 0 | 3 | . | カ | ニ | ヨ | 上 |
| 0 1 1 1 | 7 | | DC7 | ' | 7 | G | U | g | u | 0 | 0 | 7 | . | キ | ズ | ラ | キ |
| 1 0 0 0 | 8 | BS | CT0 | < | 8 | H | X | h | x | 0 | . | . | . | コ | ネ | リ | 分 |
| 1 0 0 1 | 9 | HT | CT1 | > | 9 | I | Y | i | y | 0 | . | . | . | ク | ル | ル | 千 |
| 1 0 1 0 | A | LF | | * | : | J | Z | j | z | 0 | . | . | . | エ | コ | ノ | レ |
| 1 0 1 1 | B | | ESC | + | : | K | I | k | i | C | U | . | . | オ | サ | ヒ | ロ |
| 1 1 0 0 | C | FF | | . | < | L | \ | 1 | 1 | 4 | 0 | . | . | フ | シ | フ | フ |
| 1 1 0 1 | D | CR | | - | = | M | J | m | j | 0 | . | . | . | マ | ス | へ | ン |
| 1 1 1 0 | E | CLR | | . | > | N | ^ | n | ^ | 0 | . | . | . | サ | セ | ホ | ノ |
| 1 1 1 1 | F | | | / | ? | 0 | _ | o | # | b | . | . | . | マ | ッ | ソ | マ |


CFX102

Character Table 1

CU40026SCPБ-T20A

7 . Timing

7 . 1 Parallel Interface Timing

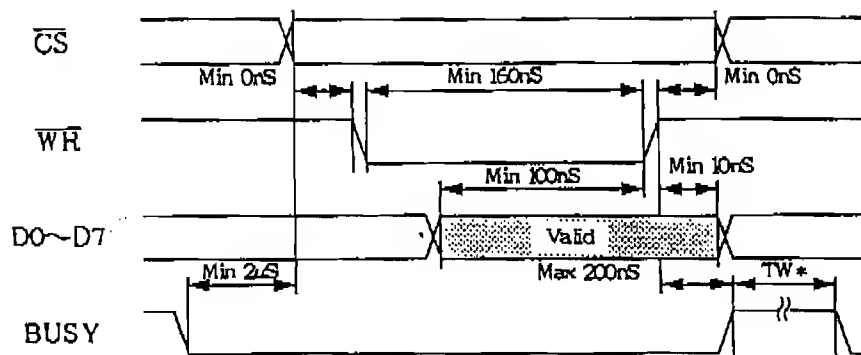

TW* : see para 8 . BUSY TIME

7 . 2 Serial Interface Timing

Serial data write, asynchronous-8bit TTL level is also acceptable.


Following baud rates can be selected by combination of the Jumper wires .

(see para . 9 . Jumper wires)

300 , 600 , 1200 , 2400 , 4800 , 9600 , 19200 BPS

Besides , parity bit-even , odd and non parity can be selected by 2 jumper wires .

(see para . 9 . Jumper wires)

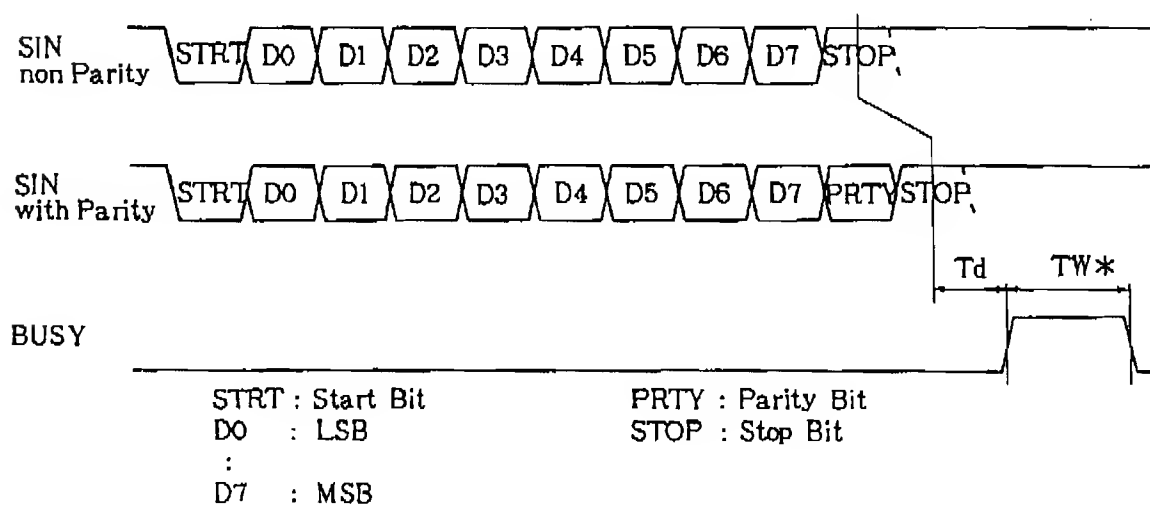

T_d : 10 μ S (Typ.) at Quick Write Mode

0 μ S (Min.) ~ 800 μ S (Max.) at Flickerless Mode

TW* : see para . 8 . BUSY Time

CU40026SCP8-T20A

8. BUSY Time

Input data execution time (TW*) at Quick Write Mode are shown as follows.

| Data | | | Execution time (TW) | | Data Writing Mode |
|--|-------------|-----------------|---------------------|------------------------------------|-------------------|
| | | | DC1 Mode | DC2 Mode | |
| Character Data, HT, LF | | | 200 μ S (Max) | 1000 μ S (Max) at scrolling | Quick write mode |
| BS, FF, CR, CT0, CT1 DC1, DC2, DC4, DC5, DC6, DC7 | | | 200 μ S (Max) | | |
| CLR | | | 900 μ S (Max) | | |
| ESC | 1st byte | | 200 μ S (Max) | | |
| | 2nd byte | "C" | 200 μ S (Max) | | |
| | | "I" | 1400 μ S (Max) | | |
| | | Except "C", "I" | 200 μ S (Max) | | |
| | 3rd byte ~ | | 200 μ S (Max) | | |


Above execution time are only talking about Quick Write Mode as mentioned.

Within Flickerless Mode, Approximately 2 to 15 times of above table should be considered.

Operating with Flickerless Mode, therefore, always watching of BUSY line is recommended.

CU40026SCPБ-T20A

9. Jumper wires

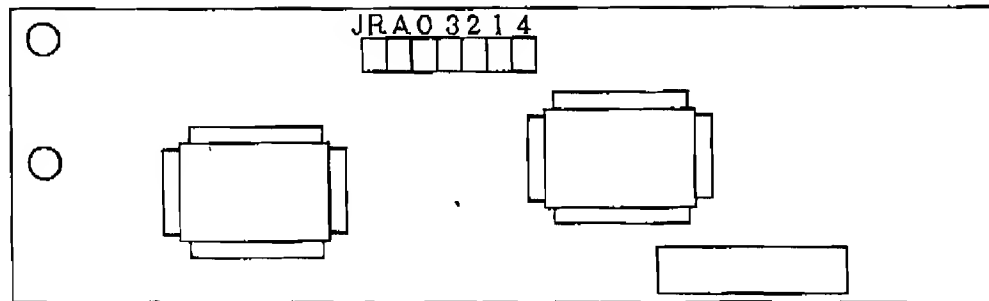

PCB PARTS SIDE


Jumper Function Table

| JA | J4 | J3 | J2 | J1 | J0 | Function | |
|----|----|----|----|----|----|--------------------------|--------------------------|
| x | x | x | 1 | 1 | 1 | Baud rate selection | 19200 BPS |
| x | x | x | 1 | 1 | 0 | | 9600 BPS |
| x | x | x | 1 | 0 | 1 | | 4800 BPS |
| x | x | x | 1 | 0 | 0 | | 2400 BPS |
| x | x | x | 0 | 1 | 1 | | 1200 BPS |
| x | x | x | 0 | 1 | 0 | | 600 BPS |
| x | x | x | 0 | 0 | 1 | | 300 BPS |
| x | x | x | 0 | 0 | 0 | | 300 BPS |
| x | 1 | 1 | x | x | x | Parity selection | Even Parity |
| x | 1 | 0 | x | x | x | | Odd Parity |
| x | 0 | x | x | x | x | | Non Parity |
| 1 | x | x | x | x | x | Character font selection | International Font (CTD) |
| 0 | x | x | x | x | x | | JIS Font (CTD) |
| 1 | 1 | 1 | 1 | 1 | 1 | Setting at Factory | |

0 : Short 1 : Open X : Don't care

10 . Connector Pin assignment

10 . 1 Data Connector

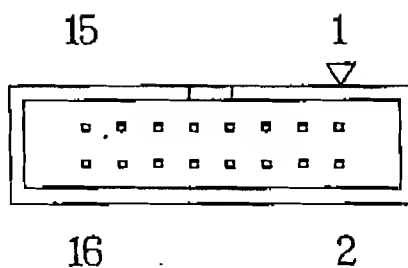


| No. | Terminal | Connection | | No. | Terminal | Connection | |
|-----|-----------------|------------|--------|-----|-----------------|------------|--------|
| | | Parallel | Serial | | | Parallel | Serial |
| 1 | D7 | ○ | NC | 2 | D6 | ○ | NC |
| 3 | D5 | ○ | NC | 4 | D4 | ○ | NC |
| 5 | D3 | ○ | NC | 6 | D2 | ○ | NC |
| 7 | D1 | ○ | NC | 8 | D0 | ○ | NC |
| 9 | \overline{WR} | ○ | NC | 10 | \overline{CS} | ○ | NC |
| 11 | SIN/TO | NC | ○ | 12 | BUSY | ○ | ○ |
| 13 | GND | ○ | ○ | 14 | GND | ○ | ○ |
| 15 | VCC | ○ | ○ | 16 | VCC | ○ | ○ |

○ : Connection

NC: No Connection

10 . 2 Power connector




| No. | Terminal | Connection | |
|-----|----------|------------|--------|
| | | Parallel | Serial |
| 1 | VCC | ○ | ○ |
| 2 | SIN/TO | NC | ○ |
| 3 | GND | ○ | ○ |

○ : Connection

NC: No Connection

CU400265CPB-120A

11 . Outline dimension

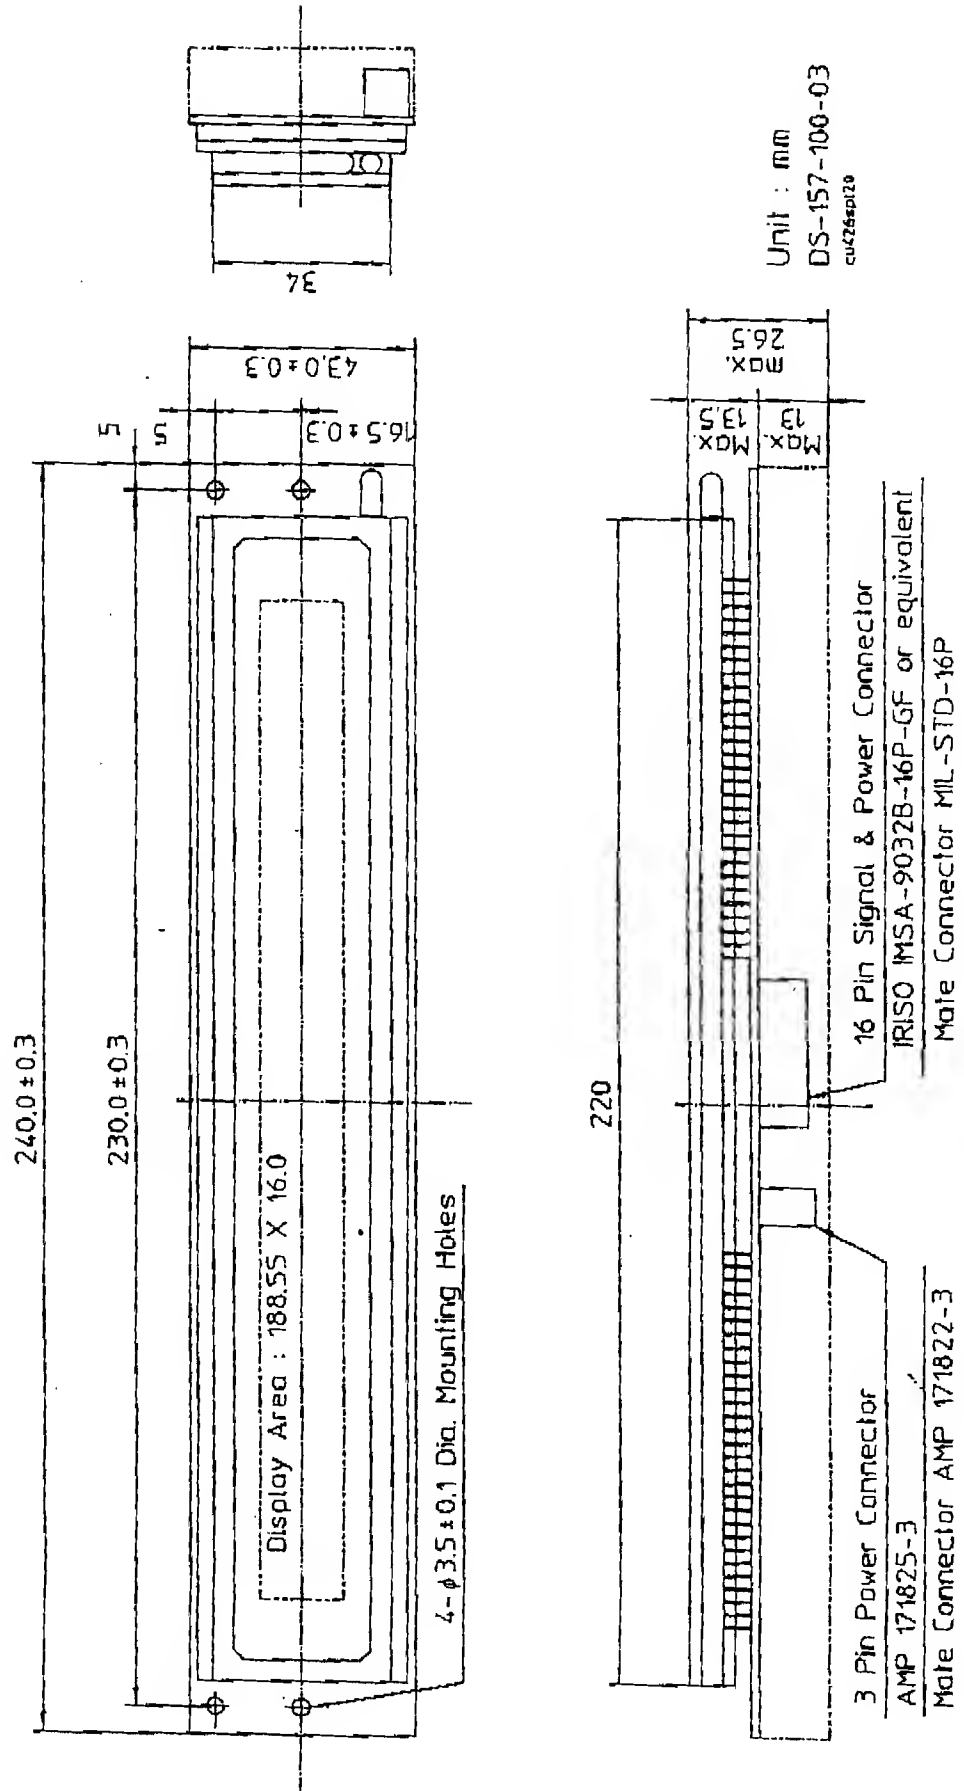

IMPORTANT PRECAUTIONS

- * All VFD Modules contain MOS LSIs or ICs. Anti-Static handling procedures are always required.
- * VF Display consists of Soda-lime glass. Heavy shock more than 100 G, thermal shock greater than 10°C/minute, direct hit with hard material to the glass surface -- especially to the EXHAUST PIPE -- may CRACK the glass.
- * Do not PUSH the display strongly. At mounting to the system frame, slight gap between display glass face and front panel is necessary to avoid a contact failure of lead pins of display. Twist or warp mounting will make a glass CRACK around the lead pin of display.
- * Neither DATA CONNECTOR or POWER CONNECTOR should be connected or disconnected while power is applied. As is often the case with most subsystems, caution should be exercised in selectively disconnecting power within a computer based system. The modules receive high logic on strobe lines as random signals on all data ports.
Removal of primary power with logic signals applied may damage input circuitry.
- * Stress more than specification listed under the Absolute Maximum Ratings may cause PERMANENT DAMEGE of the modules.
- * +5 volts power line must be regulated completely since all control logics depend on this line.
Do not apply slow-start power. Provide sufficient output current power source to avoid trouble of RUSH CURRENT at power on. (At least output current of double figure of I_{cc} , listed on the specification of each module, is required)
- * Data cable length between module and host system is recommended within 300 mm to be free from a mis-operation caused by noise.
- * Do not place the module on the conductive plate just after the power off. Due to big capacitors on the module, more than 1 min. of discharging time is required to avoide the failure caused by shorting of power line.
- * 2 hours pre-running with the test mode operation may help the stability of the brightness of the VFD when power was not applied more than 2 months.
- * Steady repeating of a fixed (static) message displaying, longer than 5 hours in a day may cause the phosphor burn-out problem. An automatic shut down programming, scrolling message using DC2 mode or 2 hours test mode operation during the idling of the host is recommended.